

⚠ WARNING! For VQ type ear strap shell only. Do not use it for any other shell. It is dangerous because it cannot be installed properly.

1. Suspension removal (see attached manual)



Some shells can be replaced without removing the suspension.

(If 2-① is possible without removing the suspension, replace it with the suspension attached.)

2. Removing the old ear strap



* Do not pull the ear straps forcibly. The claws of the shell may be damaged.

- ① Raise the hooking parts with your fingertips.
- ② Pick up the ear strap and push it down.
- ③ Twist the ear straps to remove.

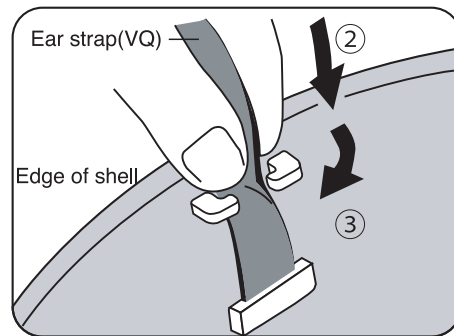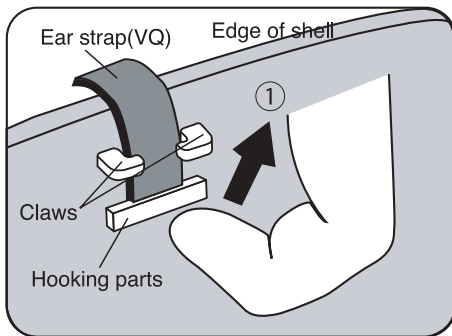

3. Attaching a new ear strap

- ① Attach the tape part of the ear strap to the nail one side at a time.
 - ② Pull the ear strap upwards until you hear a click.
- (If it is difficult to enter because it overlaps with the hooking parts of the suspension, press the hooking parts of the ear strap with your finger.)

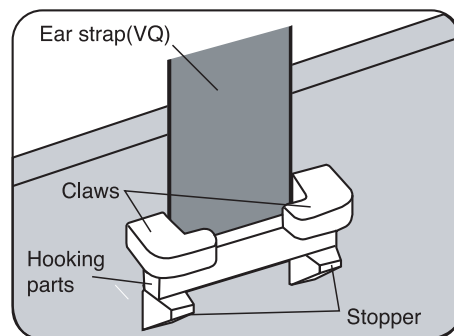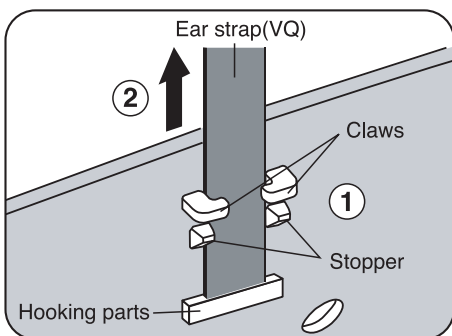

Install in 4 places, and be sure to check that both ends of the hooking part are between the claw and the stopper.

4. Suspension installation (see attached manual)